

# A100 Cargo Elevator

A100 cargo elevator is safe and durable, suit for factory, warehouse, hypermarket, shopping mall and etc, which expands the selecting range from 1000kg to 5000kg to our customer.



Car / Door



FOB-100



COB-100

	Standard	Optional
Ceiling	Powder painted steel	Hairline ST/ST
Car Panel	Powder painted steel	Hairline ST/ST
Hall Door /Car Door	Powder painted steel	Hairline ST/ST
Floor	Anti-skip steel	Rubber
Lighting	Fluorescent light	
Ventilation	Axial flow fan	
Sill	Cast iron	
Door opening	4 panel center opening	

Standard
Full collective
Emergency light
Parking Switch
Auto level
Digital position indicator


Interphone
Attendant/No service
Overload alarm
Light curtain door protection
Full load by pass

Optional
Arrival gong
Anti-bumper wood


Professional Conveyance to All Levels

# A100 Cargo Elevator

## Single opening

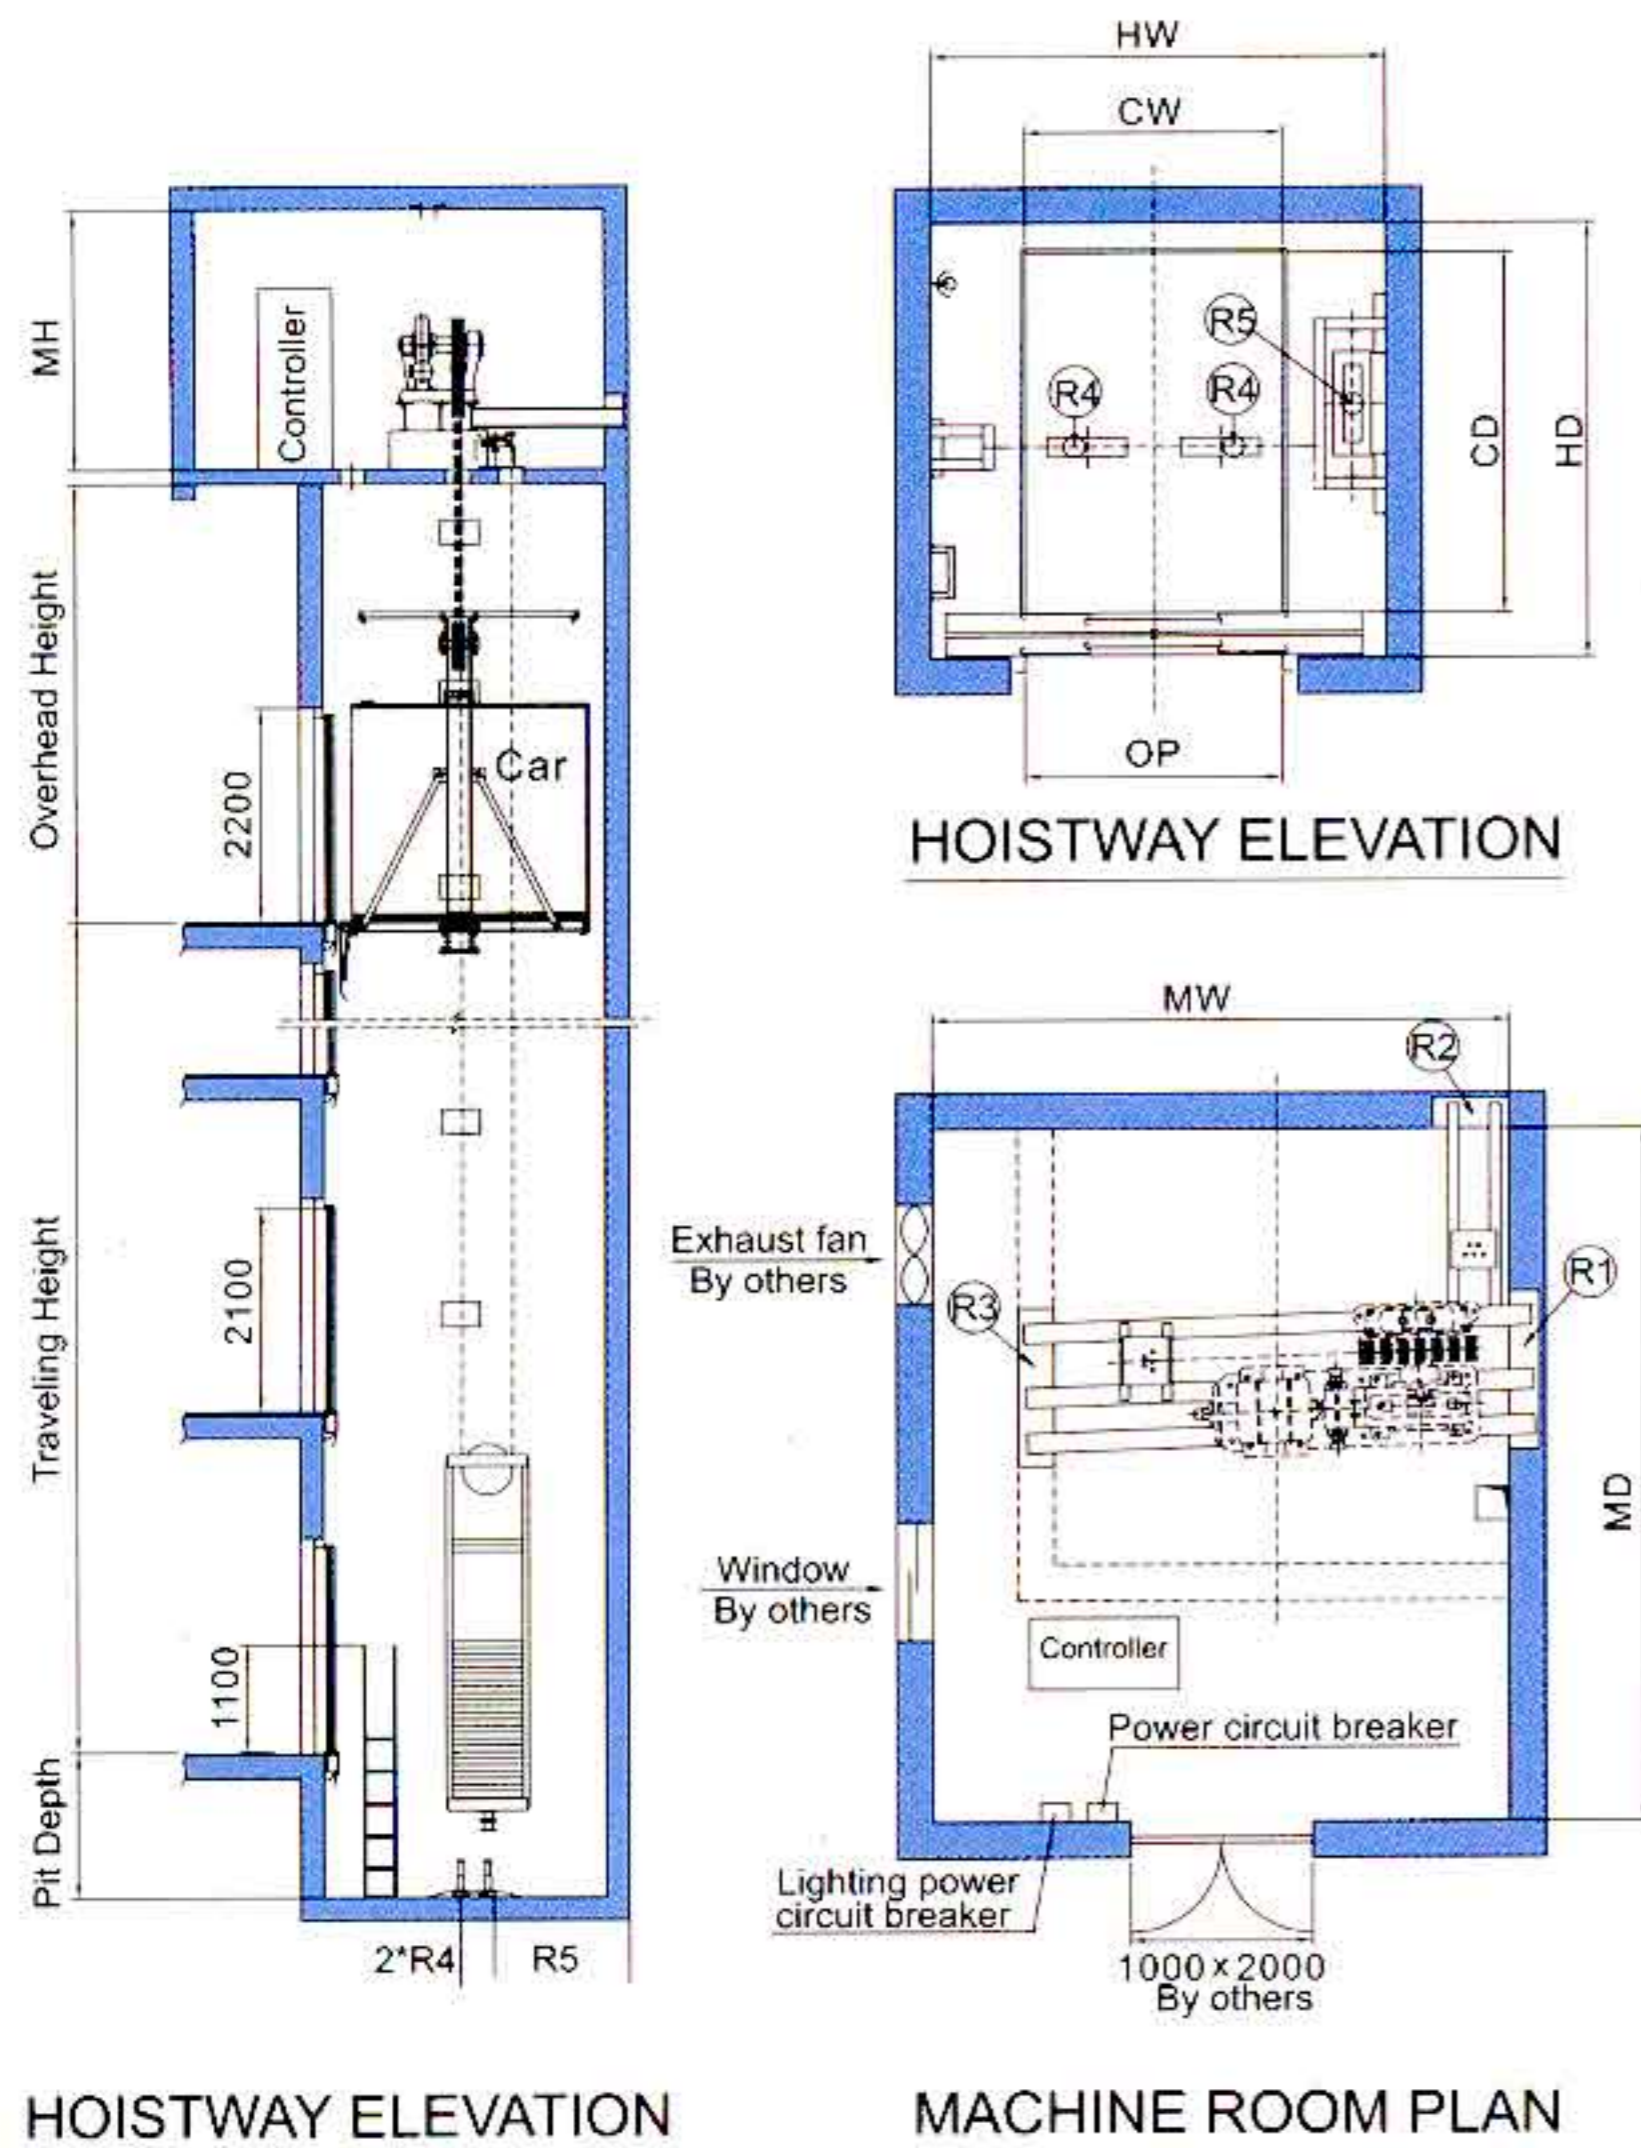

## Opposite door

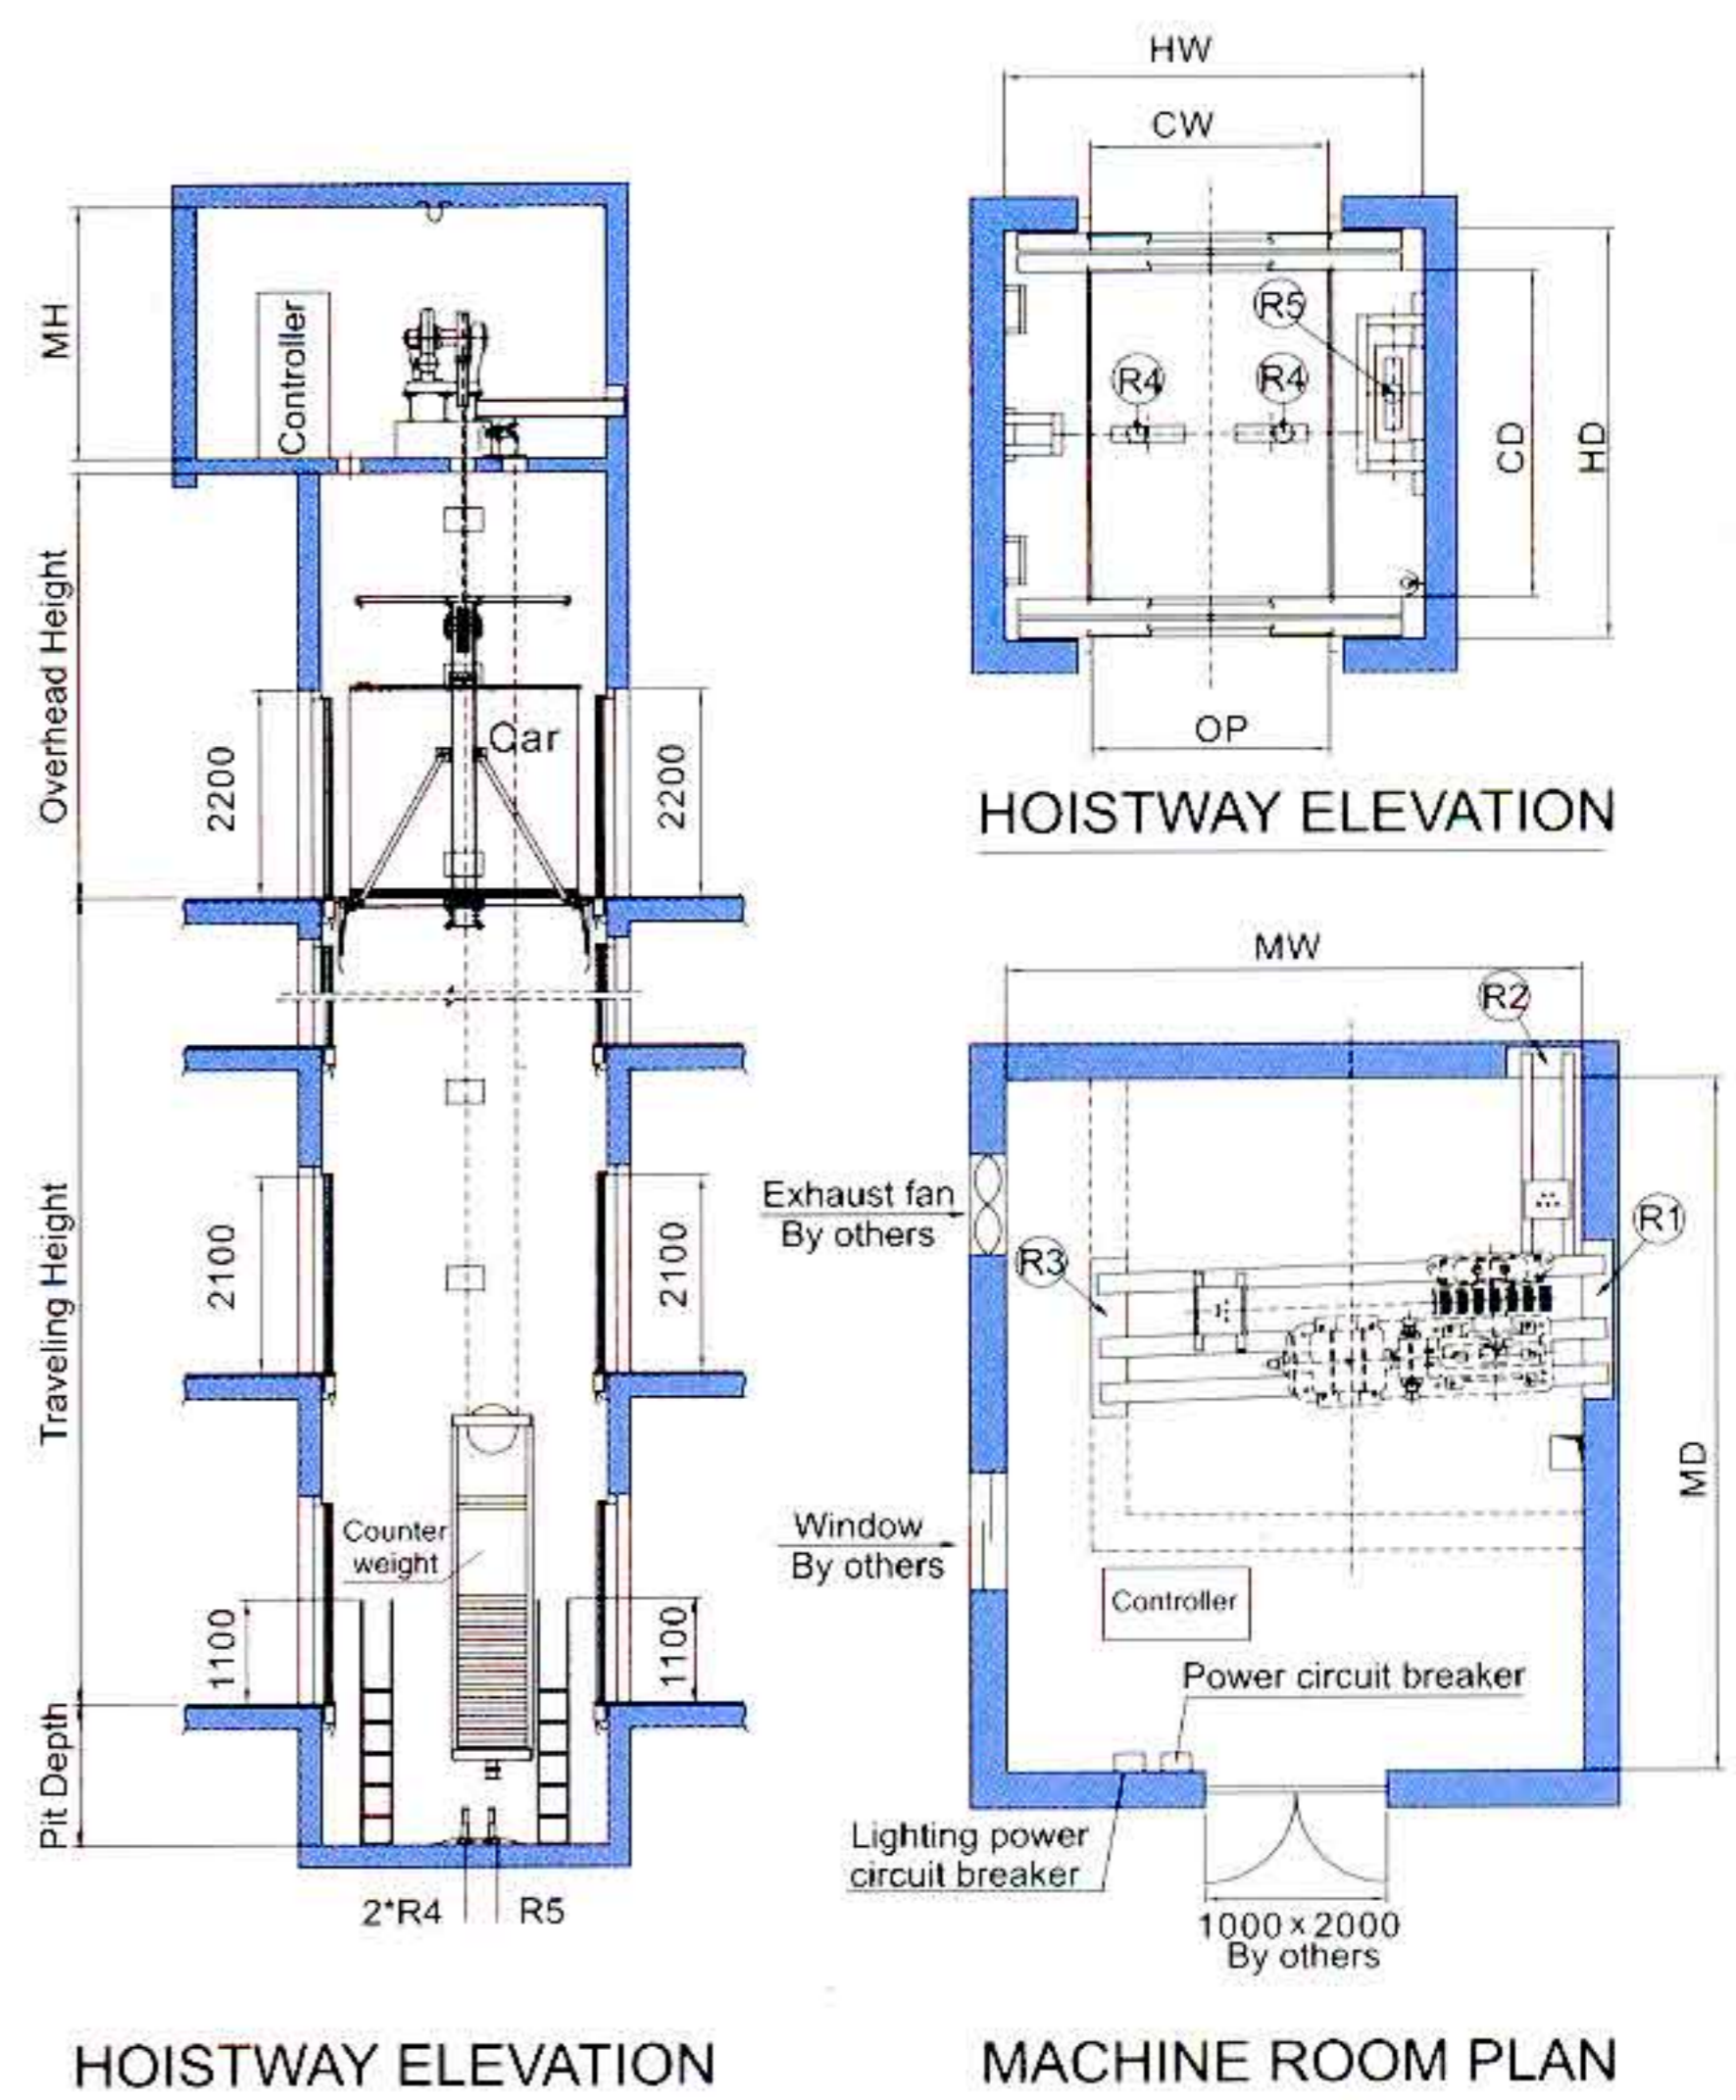

## Standard specification of A100 single door elevator

Specification	Capacity kg	Speed m/s	Power kW	Clear car dimension mm			Clear hoistway dimension mm				Max. number of stops	Max. Traveling height m	Reaction load kN				
				CW	CD	OP	HW	HD	PD	OH			R1	R2	R3	R4	R5
F1000D05S-DO	1000	0.5	7.5	1400	1700	1400	2500	2300	1400	4500	12	36	60		42	61	98
F2000D05S-DO	2000	0.5	11	1700	2400	1700	3000	3000					115	12	60	113	195
F3000D02S-DO	3000	0.25	15	2000	2900	2000	3400	3500	1500	4500			160	16	90	130	215
F3000D05S-DO		0.5	19					4200					200	19	110	143	236
F4000D02S-DO	4000	0.25	19	2000	3600	2000	3400	4200	1500	4500			200	19	110	143	236
F4000D05S-DO		0.5	22														

Note: above is simple layout, details please refer to layout brochure.

## Standard specification of A100 opposite door elevator

Specification	Capacity kg	Speed m/s	Power kW	Clear car dimension mm			Clear hoistway dimension mm				Max. number of stops	Max. Traveling height m	Reaction load kN				
				CW	CD	OP	HW	HD	PD	OH			R1	R2	R3	R4	R5
F1000D05R-DO	1000	0.5	7.5	1400	1700	1400	2500	2300	1400	4500	12	36	60		42	61	98
F2000D05R-DO	2000	0.5	11	1700	2400	1700	3000	3000					115	12	60	113	195
F3000D02R-DO	3000	0.25	15	2000	2900	2000	3400	3500	1500	4500			160	16	90	130	215
F3000D05R-DO		0.5	19					4200					200	19	110	143	236
F4000D02R-DO	4000	0.25	19	2000	3600	2000	3400	4200	1500	4500			200	19	110	143	236
F4000D05R-DO		0.5	22														

Note: above is simple layout, details please refer to layout brochure.